




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01L 3/12, G01D 5/00		A1	(11) International Publication Number: WO 99/39169
			(43) International Publication Date: 5 August 1999 (05.08.99)
(21) International Application Number: PCT/GB99/00301 (22) International Filing Date: 28 January 1999 (28.01.99) (30) Priority Data: 9802064.7 31 January 1998 (31.01.98) GB (71) Applicant (for all designated States except US): LUCAS INDUSTRIES PUBLIC LIMITED COMPANY [GB/GB]; 46 Park Street, London W1Y 4DJ (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): PINNOCK, Robert, Andrew [GB/GB]; 153 Mary Vale Road, Bournville, Birmingham B30 2DN (GB). (74) Agents: PEARCE, Anthony, Richmond et al.; Marks & Clerk, Alpha Tower, Suffolk Street Queensway, Birmingham B1 1TT (GB).		(81) Designated States: BR, JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: COMBINED TORQUE AND ANGULAR POSITION SENSOR

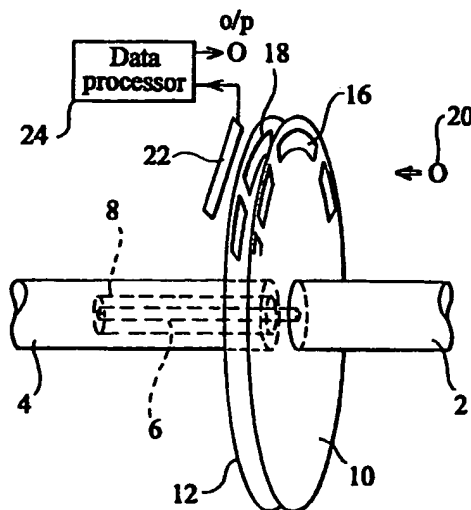

(57) Abstract

A combined torque and angular position detector includes two disks (10, 12) rotatable about a common axis. Relative angular displacement of the disks results from torque applied thereto. Each disk has a number of regions of differing optical transmissivity and these control the transmission of optical radiation from a source (20) to an array (22) on which an image of the regions of the disks is formed. A data processor (24) processes image intensity data and determines the angular positions of the disks and their relative displacement. Alternative arrangements are described in which positional information is derived by (i) providing one disk regions of intermediate transmissivity of width varying around one disk, (ii) by having the regions of lesser transmissivity of width varying around one disk or (iii) by arranging combinations of regions of several different widths around one disk.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

COMBINED TORQUE AND ANGULAR POSITION SENSOR

This invention relates to a combined torque and angular position sensor for use, for example, in an electrical power assisted steering system (EPAS).

W095/06330 discloses a torque sensor in which there are two relatively movable rotary elements which each have alternating first and second regions of differing transmissivities, such regions acting to modulate optical radiation from a source to form an image on an optical sensor array. Data taken from the array is analysed by a data processor to determine the relative positions of the two rotary elements by detecting the widths of gaps between a first dark area created by a low transmissivity region on one rotary element and dark areas on opposite sides of the first dark area, such dark areas being created by two adjacent low transmissivity regions on the other rotary element.

In an EPAS system it is also necessary for the current absolute position of the rotary elements to be known and in W095/06330 an arrangement is described in which a number of the low transmissivity regions on one rotary element is of width different from the remainder, so that an "index" position can be established when these regions are detected. It has been found that a single different low transmissivity region is sufficient for this purpose, but when the system is initially switched on the rotary elements may have to be turned through up to 180° to enable the index position to be detected.

- 2 -

It is an object of the present invention to provide a combined torque and angular position sensor in which the absolute position can be established without requiring any turning of the rotary elements at start-up.

In accordance with one aspect of the present invention there is provided a combined torque and angular position detector comprising a source of optical radiation, an array of optical sensors, first and second elements interposed between the source and the array, said elements being rotatable together and also angularly movable relative to one another to a limited extent for torque measurement, said first and second elements each having a plurality of alternating first and second regions, the first regions having greater optical transmissivities than the second regions, said second element also having further regions of optical transmissivity intermediate the transmissivities of the first and second regions, said further regions each being of different angular width, and a data processor arranged to collect optical intensity data from each of the sensors of the array and operating to process such data to determine the angular position of the second element by measuring the width and position of an image of a detected one of said further regions thereon, and the relative angular displacement of the first and second elements by measuring the position of the image of a second region of the second element relative to the positions of the images of two adjacent second regions of the first element.

Preferably, the positions of the images first and second regions are determined by comparing the optical intensity data for each sensor of the array with an upper threshold value. Positions of the further regions are

- 3 -

determined by comparing the intensity data for each sensor of the array with a lower threshold value.

Preferably, the further regions of the second element are arranged to lie centrally within the first regions thereof.

The second element may be formed by laminating a mask which defines the first and second regions with a transparent overlay which has semi-transparent areas forming the further regions.

In accordance with a second aspect of the invention there is provided a combined torque and angular position sensor comprising a source of optical radiation, an array of optical sensors illuminated by said source, first and second elements interposed between the source and the array, said first and second elements being rotatable together and angularly movable relative to one another to a limited extent for torque measurement, each of said first and second elements having a plurality of alternating first and second regions, said first regions having greater optical transmissivities than the second regions, the second regions of second element varying in angular width such that the angular widths of the first regions thereof decrease progressively around said second element, and a data processor connected to receive optical intensity data from each of the sensors of the array and operating to process such data to determine the angular position of the second element by measuring the position and width of the image of the second regions of the second element, and the relative angular displacement between the elements by measuring the position of an image of a second regions of the first element relative to the positions of images of two adjacent second regions of the second element.

- 4 -

The second regions of the second element are preferably arranged with their centre lines equi-angularly spaced around the element.

There are preferably two sensor arrays at diametrically opposite positions. In this case the second regions of the second element are preferably arranged mainly in adjacent pairs around the second element, the two second regions of each pair being of the same angular width. To avoid having a situation where each array can "see" only second regions of the same width as each other, the pairs are staggered by the inclusion of single second regions at non-opposite positions.

In accordance with a third aspect of the invention, there is provided a combined torque and angular position sensor comprising a source of optical radiation, an array of optical sensors illuminated by said source, first and second elements interposed between the source and the array, said first and second elements being rotatable together and also angularly movable relative to one another to a limited extent for torque measurement, each of the first and second elements having a plurality of alternating first and second regions, the first regions being of greater optical transmissivity than the second regions, whereby a combined image of a zone of said elements is formed on the array, the widths of said second regions differing from one another such that in any position of the first and second element, images of second regions having a unique combination of angular widths are present in the image, and a data processor connected to receive optical intensity data from each of the sensors of the array and operating on such data to determine a coarse measurement of the angular position of the elements by identifying which

- 5 -

unique combination occurs in the image, a fine measurement of angular position in accordance with the position of the image of a selected second region within the sensitive image and the relative angular position of the elements by determining the position of the image of a second region of one element relative to the images of two adjacent second region of the other element.

Preferably to obtain sufficient data to identify the unique combinations and measure the angular position and relative angular displacement with a high level of resolution and accuracy it is desirable to utilise two sources and two sensor arrays at diametrically opposite positions relative to the common axis of the first and second elements.

In the accompanying drawings:

Figure 1 is a diagram showing the general features of a combined torque and angular position detector of the type to which the present invention relates;

Figure 2 is a block diagram of circuitry provided for loading data from each sensor of a sensor array included in Figure 1 into a data processor;

Figure 3 is a diagrammatic representation of a modification of the sensor shown in Figure 1 in accordance with the present invention;

Figure 4 shows idealised "waveforms" derived from the sensor array in a zero torque condition using the modification shown in Figure 3;

- 6 -

Figure 5 shows idealised "waveforms" derived from those shown in Figure 4, Figure 5(b) to 5(i) showing the effect of small changes of position of the sensor elements relative to the sensor array as indicated by lines (b) to (i) in Figure 4;

Figures 6 and 7 show idealised "waveforms" corresponding to those shown in Figures 4 and 5 but with maximum torque present;

Figure 8 is a diagram illustrating a second embodiment of the invention;

Figures 9 and 10 are idealised "waveforms" corresponding to those shown in Figures 4 and 5, but for the second embodiment;

Figures 11 and 12 are idealised "waveforms" corresponding to Figures 6 and 7, but for the second embodiment;

Figure 13 is an illustration showing a third embodiment of the invention;

Figure 14 is a chart showing a sequence of codes which are obtained in this third embodiment of the invention for coarse determination of angular position;

Figure 15 is a set of idealised "waveforms" derived from the sensor arrangement shown in Figure 13 at zero torque;

Figure 16(a) to (e) is a set of idealised waveforms derived from those shown in Figure 15 showing the effect of relatively small changes in the

- 7 -

relative position of the sensor arrays and indicated in lines (a) to (h) in Figure 17;

Figure 17 is a view like Figure 5 for the maximum torque condition, and

Figure 18 and 19(a) to (h) correspond to Figure 16(a) to (e) in the full torque condition.

The basic structure of the combined torque and angular position sensors described below is shown in Figure 1 which is the same as Figure 1 of W096/06330, the description of which may be referred to for a full understanding of the operation of the sensor.

Basically the sensor includes two side-by-side disk elements 10, 12 respectively mounted on two aligned shafts 2, 4 interconnected by a torsion bar 6 in a bore 8 in shaft 14. Each disk element 10, 12 is formed with an annular arrangement of arcuate slots 16, 18, the slots 16, 18 representing portions of the disk elements 10, 12 which have a higher optical transmissivity than the portions which separate the arcuate slots. In the following description these separating portions are referred to as "spokes". There are an equal number (e.g. 36) of equi-angularly spaced spokes on each disk element and those on one disk element have a greater angular width than those on the other element.

A light source 20 is provided on one side of the disks and an optical sensor array 20 is provided on the other. The spokes cast a shadow image on the sensor array and by reading optical intensity data from each sensor in the array 22 into a data processor 24 and processing this data it is

- 8 -

possible to determine the angular displacement of one disk element relative to the other.

The light source 20 is a point source with a diffuser, so that the edges of the shadow image are somewhat blurred making it possible to determine edge positions to a high level of resolution than that which would otherwise be imposed by spacing of the sensors in the array 22.

Various errors are introduced into the intensity measurements taken because of variations in the sensitivity of the sensors in the array according to the angle of incidence of the light. Furthermore distortions are introduced by geometric features of the sensor, but, as explained in detail in W096/06330, the data processor compensates for these errors and distortions and can produce linearised idealised "waveforms" which are effectively idealised snapshots of the image on the array.

The array used is a 128 pixel linear array which includes, as is usual 128 analog storage elements into which signals are fed simultaneously when a snapshot is taken. These signals are then read out sequentially into a differential amplifier 80 via a pixel buffer 74 under the control of a clock generator 82 controlling switches 70-73. The differential amplifier provides a signal indicating the difference between the pixel value and a "dark pixel" reference value 76 via a pixel buffer 78. The difference signal is stored in a sample and hold circuit 84 and is then transferred via an output buffer to an a/d converter (not shown) of the data processor. For each snapshot 128 digital values are stored in the RAM of the processor for subsequent processing.

Turning now to Figure 3, the basic sensor of Figure 1 is modified by the addition of a transparent annular overlay 100 which has semi-transparent zones 100a on it. The semi-transparent zones 100a are of progressively greater width around the overlay, but their centres are equi-angularly spaced. The overlay 100 is attached to the disk element 12 with the semi-transparent zones mid-way between the spokes of element 12. The spokes of the element 10 are of a basic width x subtending an angle of 1.2901° at the centre of the disk. The spokes of disk element 12 are 1.4 times this width. The semi-transparent zones vary from $1.6x$ to $5.2x$ in steps of $0.1x$.

Figure 4 shows the idealised "waveform" derived by the processor from the data read from the array following a snap-shot, the peaks in the waveform representing the dark spaces detected. At zero torque, the "full height" portions are exactly as they would be in the basic design. The "half-height" portions created by the semi-transparent zones of the overlay 100 are shown as W_a , W_b , W_c . The processor can differentiate between full height and half height portions by performing two series of comparisons of the waveform with an upper reference level for torque determination and with a lower reference level for position determination.

As shown in Figure 5, in the zero torque condition, no matter what part of the waveform is visible to the sensor at the instant of the snapshot, the full width of a half height portion is always visible allowing the processor to determine which one of the semi-transparent zones is visible and to determine its exact position in the array window to allow angular position to be accurately calculated.

- 10 -

Figure 6 shows the situation where full torque is applied. As in the basic sensor of Figure 1, the processor can readily determine the relative displacement of the two disk elements relative to one another (and hence the torque). As shown in Figure 7 it is always possible to identify the semi-transparent zone which is visible, either by direct measurement of its width or by measurement of the width of the gap following it when the leading edge is obscured by a full height spoke, or the gap preceding it when the trailing edge is so obscured.

In the embodiment shown in Figure 8, no transparent overlay is used. Instead, the spokes on the disk element 12 vary from 1.2x width to 3.0x width as shown diagrammatically. As shown an increment of 0.1x is applied to the width of alternate spokes, and this has the effect of making the gaps between spokes reduce progressively in the clockwise direction as viewed in Figure 8. Two arrays are employed at diametrically opposite positions and to ensure that a situation cannot occur where the only spokes which can be seen by each array, the pairs of spokes are staggered by the inclusion of two single spokes 110, 120 at non-opposite positions.

The zero torque and maximum torque waveforms of Figures 9 to 12 show that wherever the array windows are located at the time of the snapshot it is always possible to determine the ratio between the gaps to determine the torque and the width of a spoke to identify the coarse position of the dark elements. The processor can use the variable spoke width data and the gap data to determine the torque and absolute position accurately.

In the arrangement shown in Figure 13, four different widths of spokes are used on the two disk elements 10, 12. The spoke widths are $a = x$,

- 12 -

that it is possible to distinguish between the disk elements as only disk element 10 has "a" spokes. The coarse disk element position is ascertainable to within 5° simply from the codes, fine position data being calculated as in the previous embodiments in terms of the exact position of the spoke image in the window.

In assigning the position code, where a particular spoke in one window is opposite a wider spoke in the other it is possible that one or other of the edges of the wider spoke may be just outside the array window. See, for example, Figure 16(b) where a complete "a" spoke appear in the array 1 image, but the corresponding "b" spoke is only partially within the array 2 image. This situation is recognised by the processor which takes into account only complete spoke pair images and assigns the correct code bbac, rather than abbc - i.e. the first "a" spoke is ignored.

CLAIMS

1. A combined torque and angular position detector comprising a source of optical radiation, an array of optical sensors, first and second elements interposed between the source and the array, said elements being rotatable together and also angularly movable relative to one another to a limited extent for torque measurement, said first and second elements each having a plurality of alternating first and second regions, the first regions having greater optical transmissivities than the second regions, said second element also having further regions of optical transmissivity intermediate the transmissivities of the first and second regions, said further regions each being of different angular width, and a data processor arranged to collect optical intensity data from each of the sensors of the array and operating to process such data to determine the angular position of the second element by measuring the width and position of an image of a detected one of said further regions thereon, and the relative angular displacement of the first and second elements by measuring the position of the image of a second region of the second element relative to the positions of the images of two adjacent second regions of the first element.
2. A detector as claimed in Claim 1 in which said data processor determines the positions of the images of said first and second regions by comparing the optical intensity data for each sensor of the array with an upper threshold value.
3. A detector as claimed in Claim 2 in which said data processor

- 14 -

determines the positions of the images of said further regions by comparing the intensity data for each sensor in the array with a lower threshold value.

4. A detector as claimed in any preceding claim in which said further regions of said second element are arranged to lie centrally within respective ones of the first regions thereof.

5. A detector as claimed in any preceding claim in which the second element comprises a first mask defining said first and second regions laminated with a transparent overlay which has semi-transparent areas forming said further regions.

6. A combined torque and angular position sensor comprising a source of optical radiation, an array of optical sensors illuminated by said source, first and second elements interposed between the source and the array, said first and second elements being rotatable together and angularly movable relative to one another to a limited extent for torque measurement, each of said first and second elements having a plurality of alternating first and second regions, said first regions having greater optical transmissivities than the second regions, the second regions of second element varying in angular width such that the angular widths of the first regions thereof decrease progressively around said second element, and a data processor connected to receive optical intensity data from each of the sensors of the array and operating to process such data to determine the angular position of the second element by measuring the position and width of the image of the second regions of the second element, and the relative angular displacement between the elements by measuring the

- 15 -

position of an image of a second regions of the first element relative to the positions of images of two adjacent second regions of the second element.

7. A detector as claimed in Claim 6 in which said second regions of the second element have centre lines which are equi-angularly spaced around said second element.

8. A detector as claimed in Claim 7 in which there are two sensor arrays at diametrically opposite positions.

9. A detector as claimed in Claim 8 in which the second regions of the second element are arranged mainly in adjacent pairs around the second element, the two second regions of each pair being of the same angular width.

10. A detector as claimed in Claim 9 in which the pairs of regions are staggered relative to one another by the inclusion of two single second regions at non-opposite positions.

11. A combined torque and angular position sensor comprising a source of optical radiation, an array of optical sensors illuminated by said source, first and second elements interposed between the source and the array, said first and second elements being rotatable together and also angularly movable relative to one another to a limited extent for torque measurement, each of the first and second elements having a plurality of alternating first and second regions, the first regions being of greater optical transmissivity than the second regions, whereby a combined image of a zone of said elements is formed on the array, the widths of said

- 16 -

second regions differing from one another such that in any position of the first and second element, images of second regions having a unique combination of angular widths are present in the image, and a data processor connected to receive optical intensity data from each of the sensors of the array and operating on such data to determine a coarse measurement of the angular position of the elements by identifying which unique combination occurs in the image, a fine measurement of angular position in accordance with the position of the image of a selected second region within the sensitive image and the relative angular position of the elements by determining the position of the image of a second region of one element relative to the images of two adjacent second region of the other element.

12. A detector as claimed in Claim 11 in which two sources and two arrays are provided at diametrically opposite positions relative to the common axis of the first and second elements.



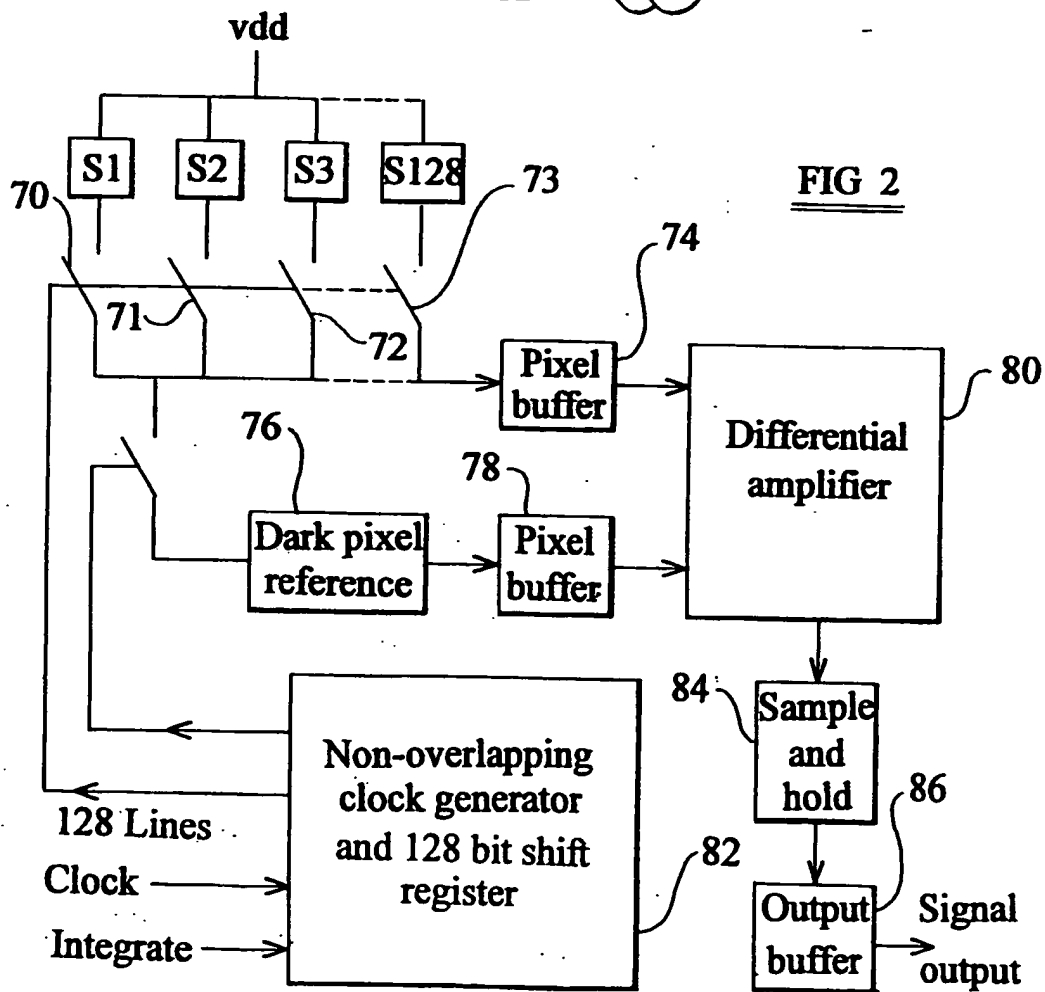


FIG 3

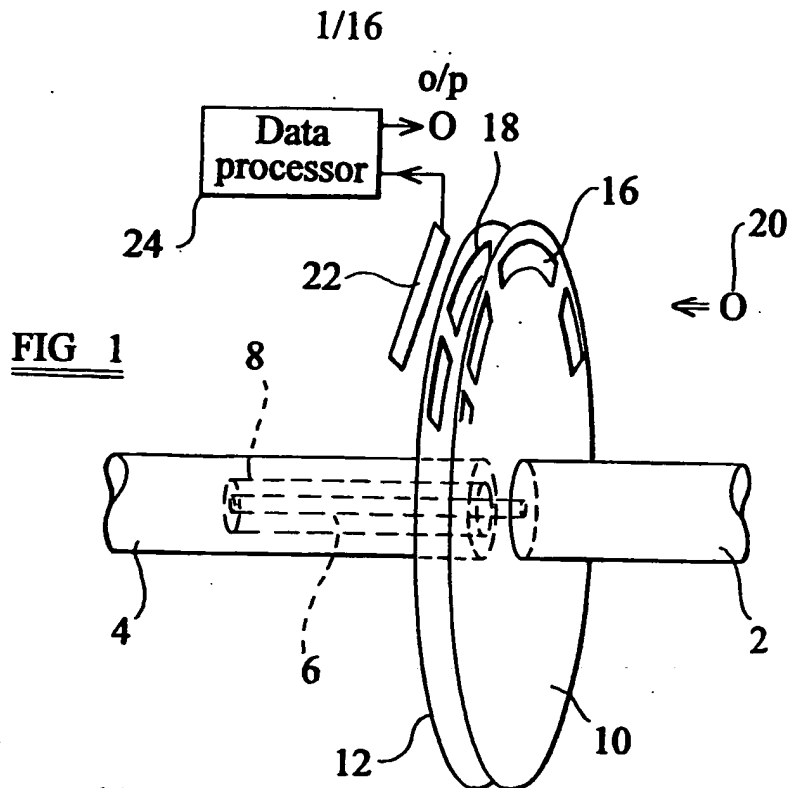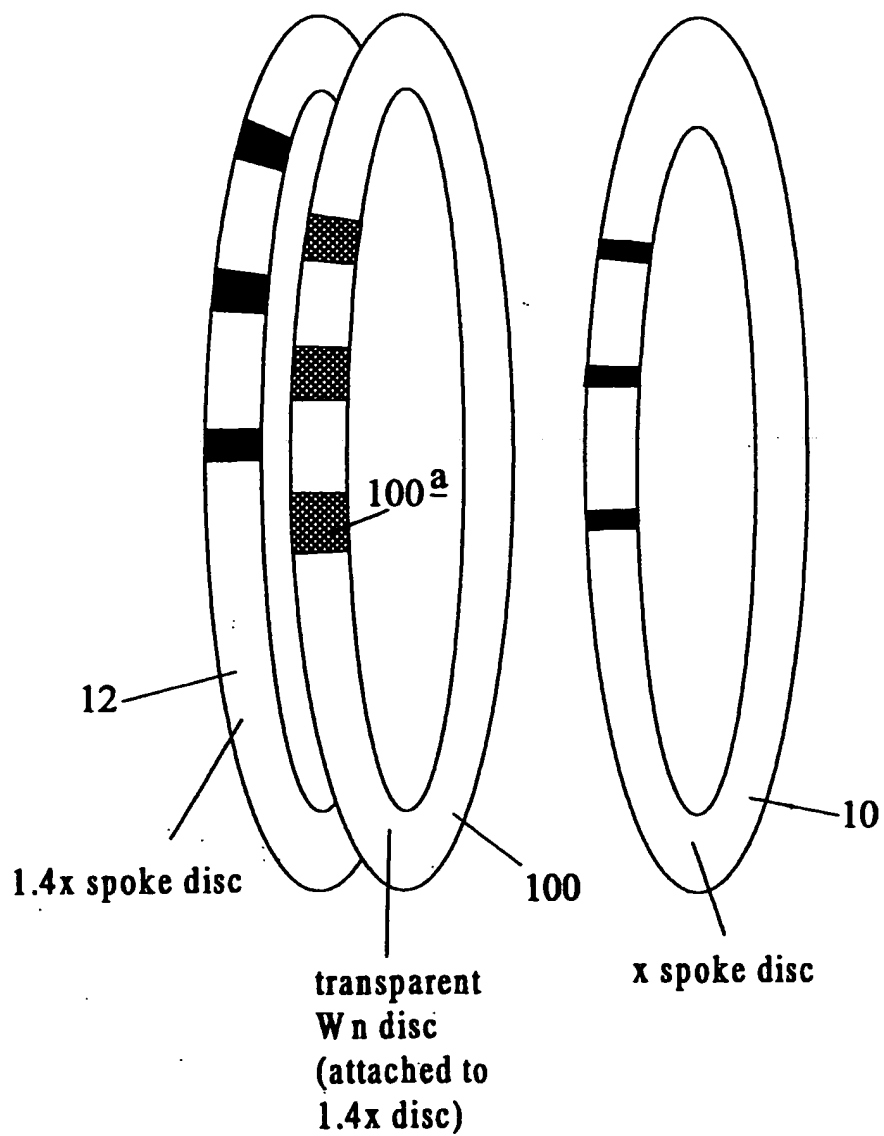

4/16




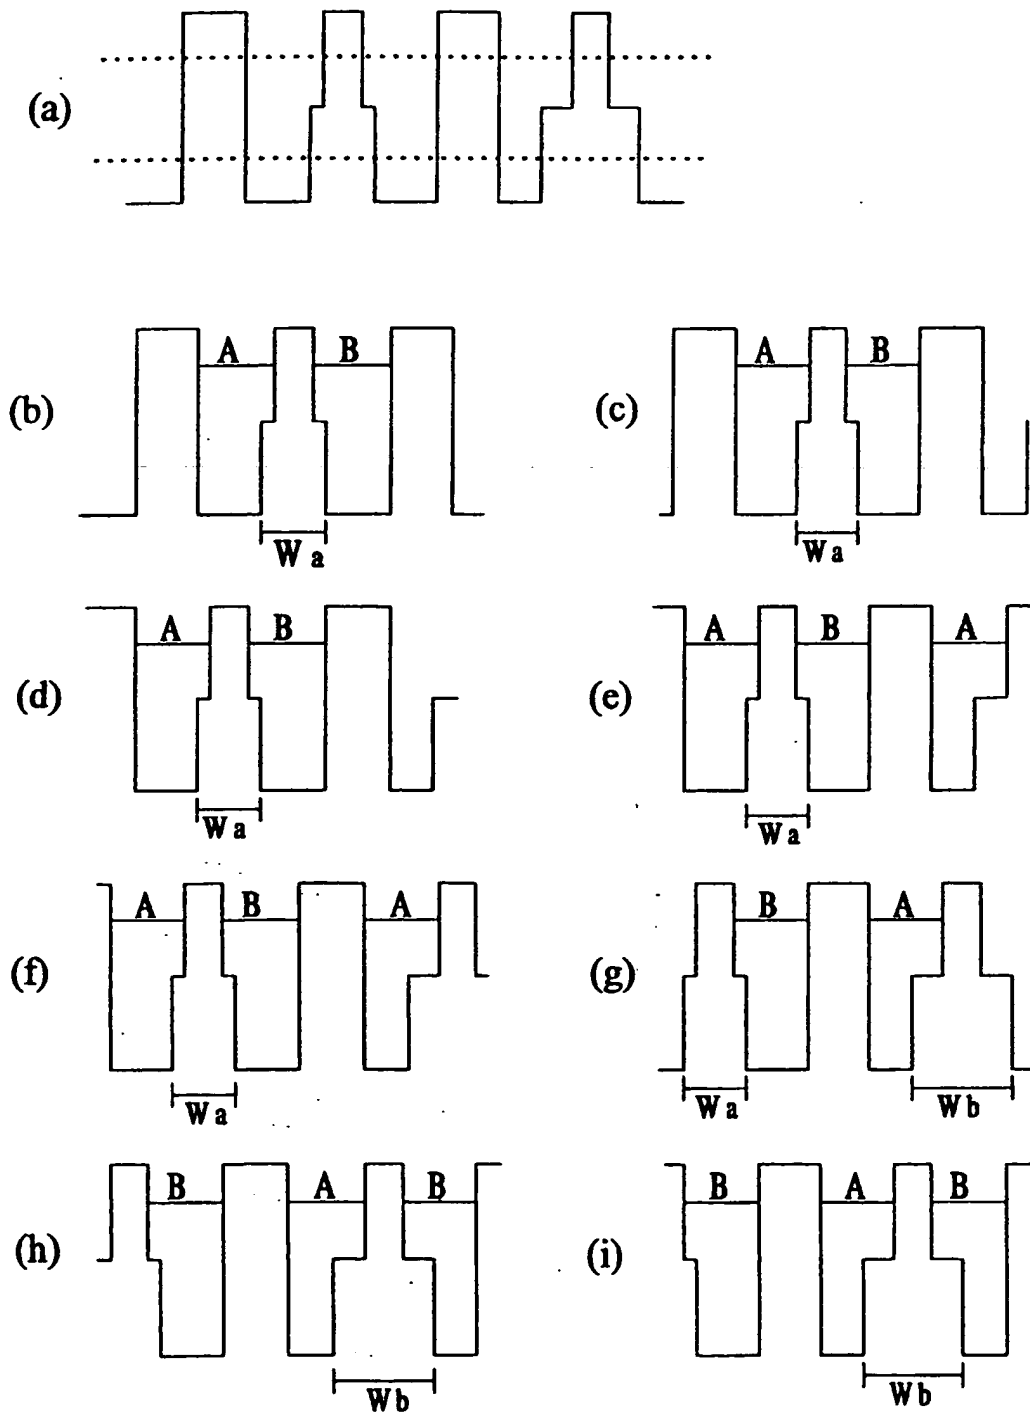
FIG 5

FIG 6

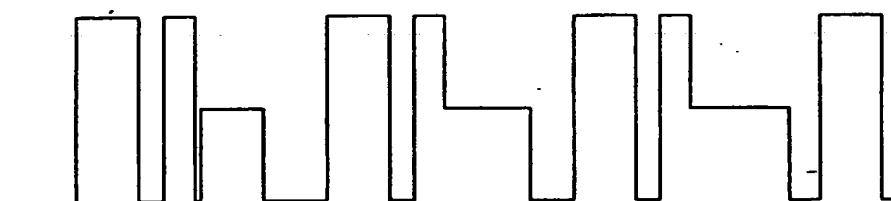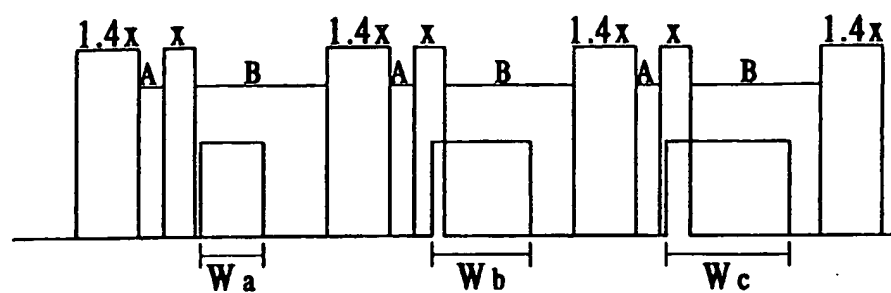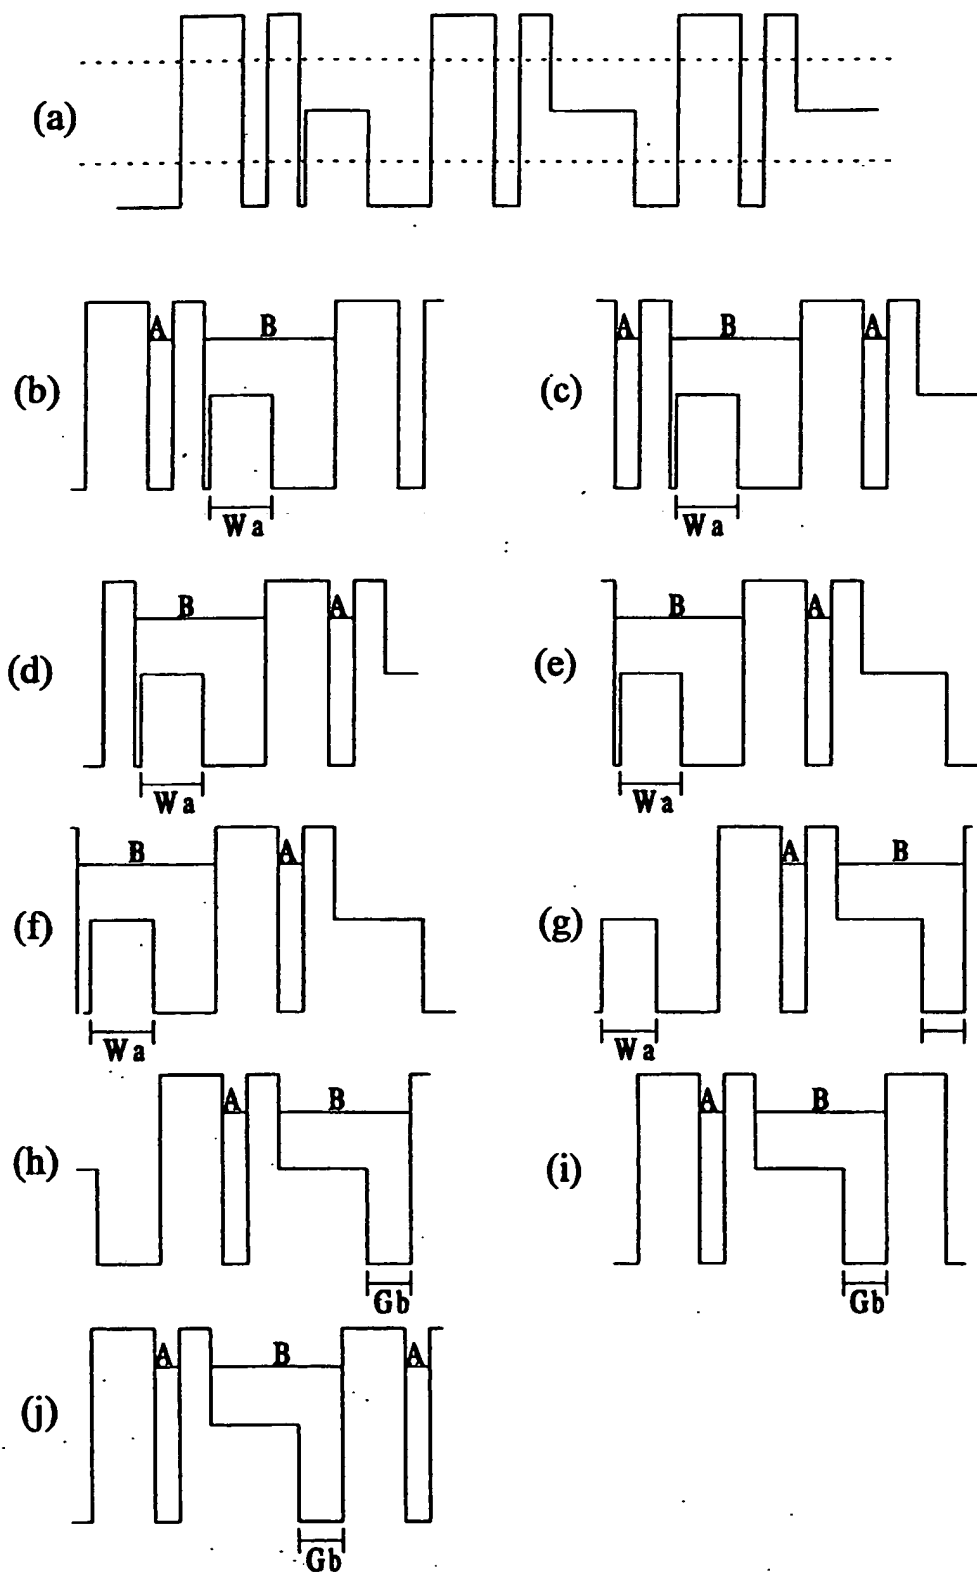


- (b)
- (c)
- (d)
- (e)
- (f)
- (g)
- (h)
- (i)
- (j)

6/16



FIG 7

7/16



FIG 8

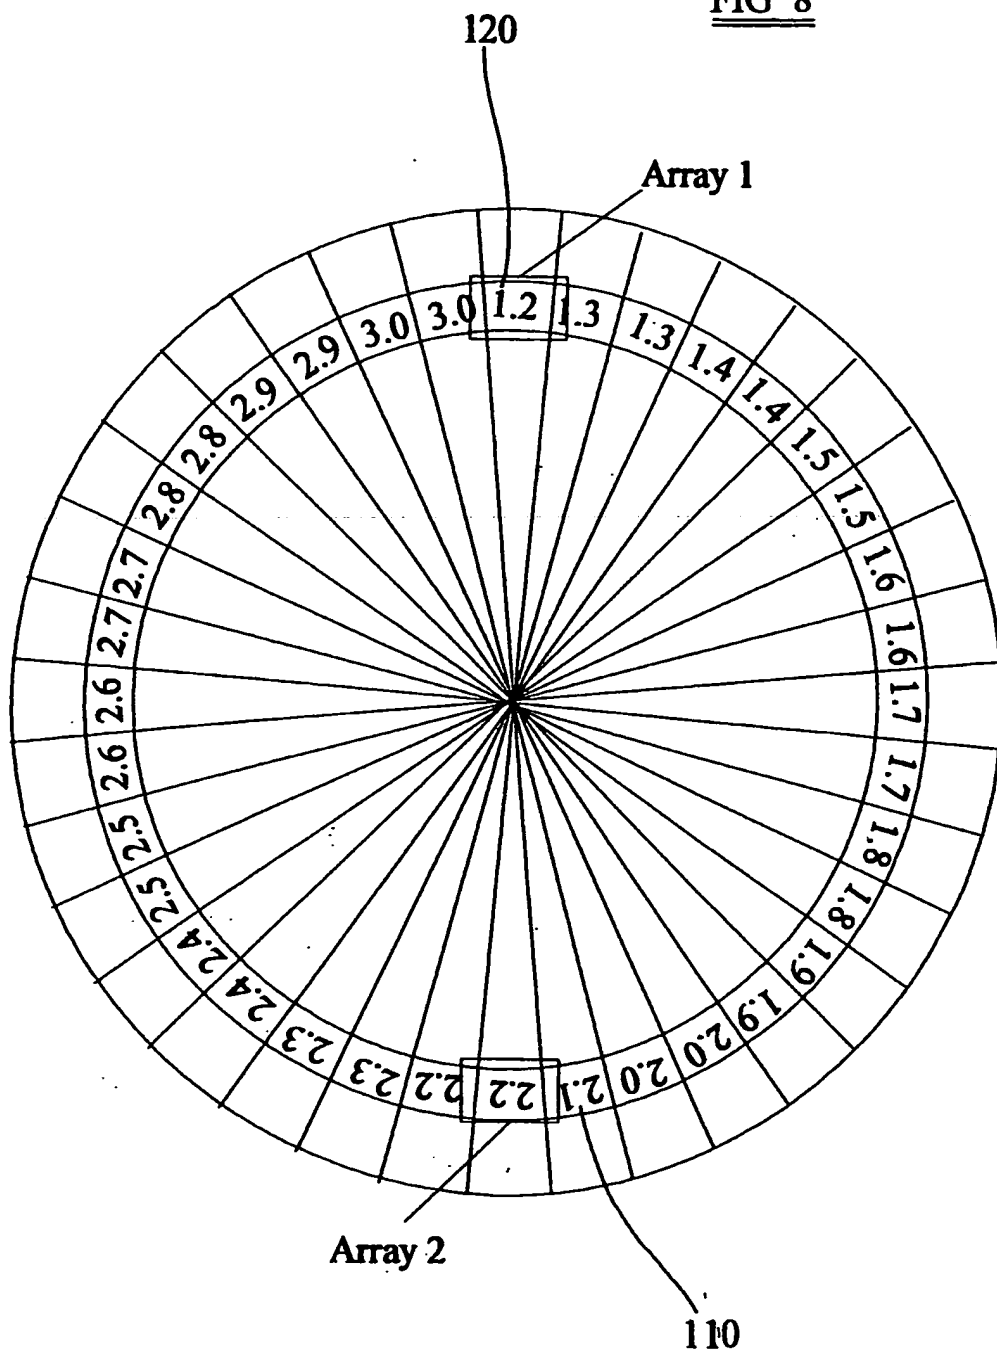


8/16

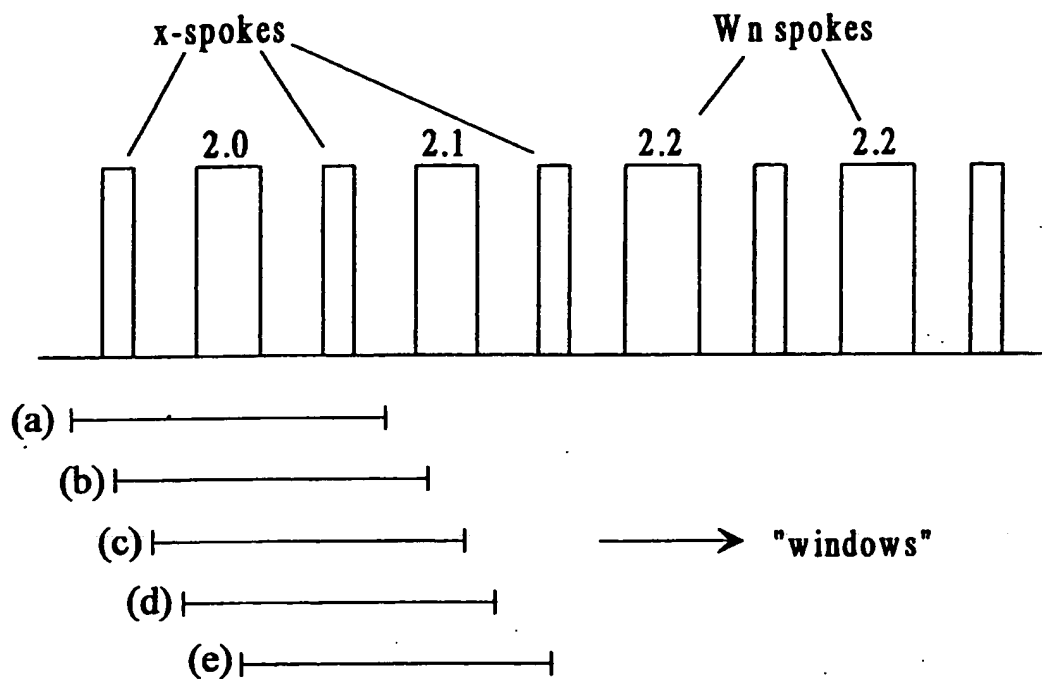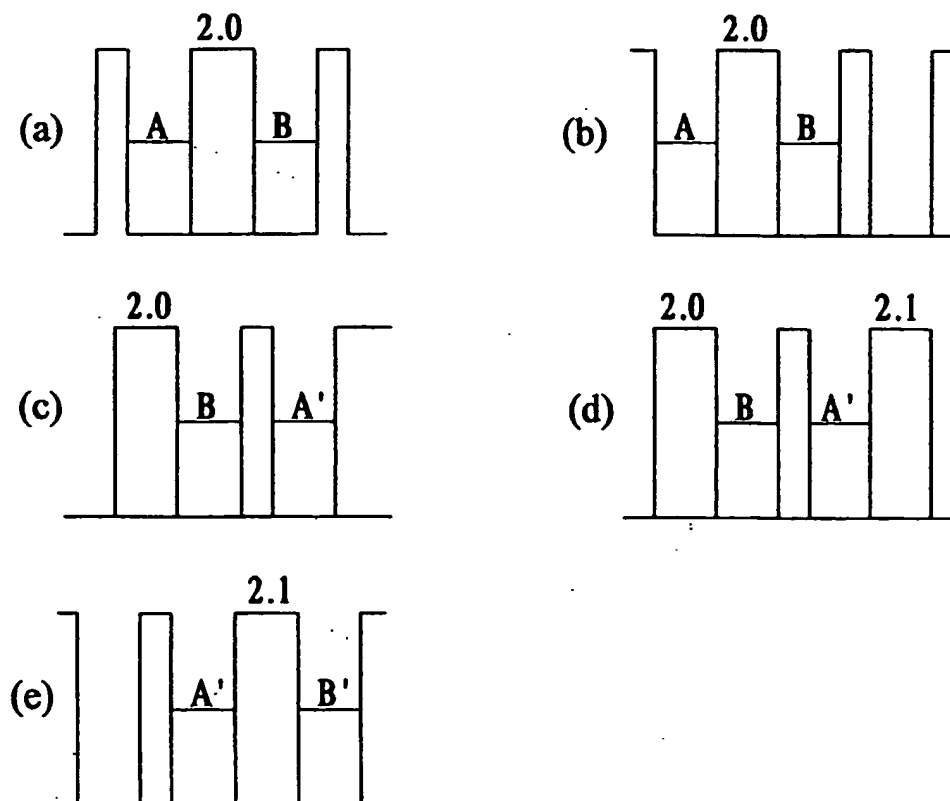FIG 9FIG 10


9/16

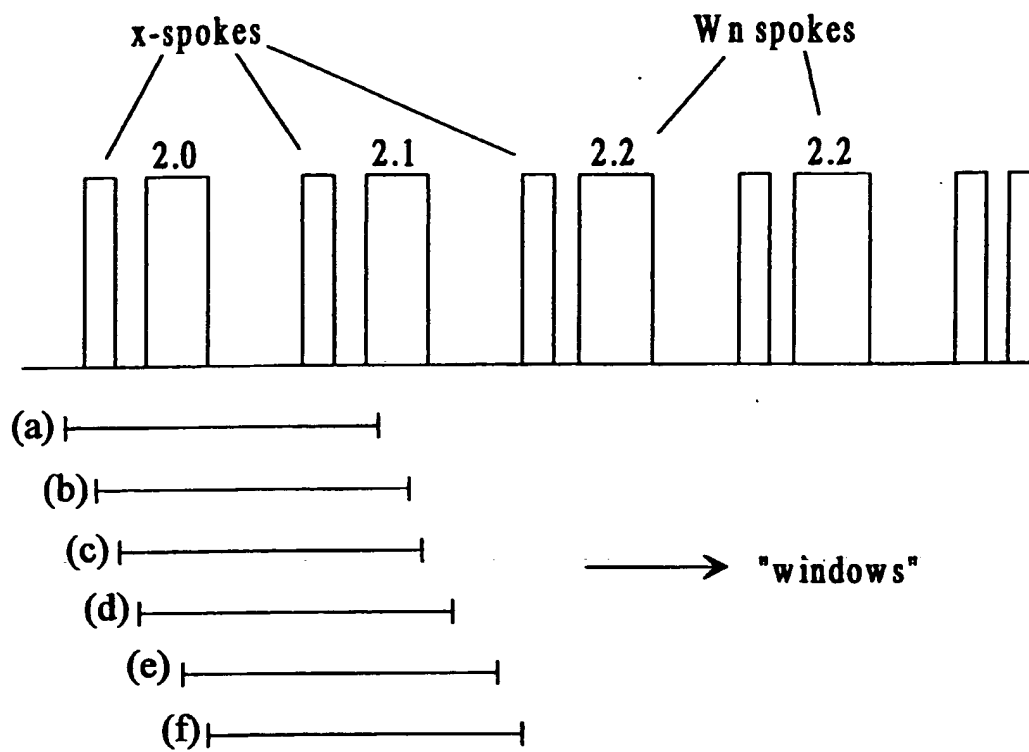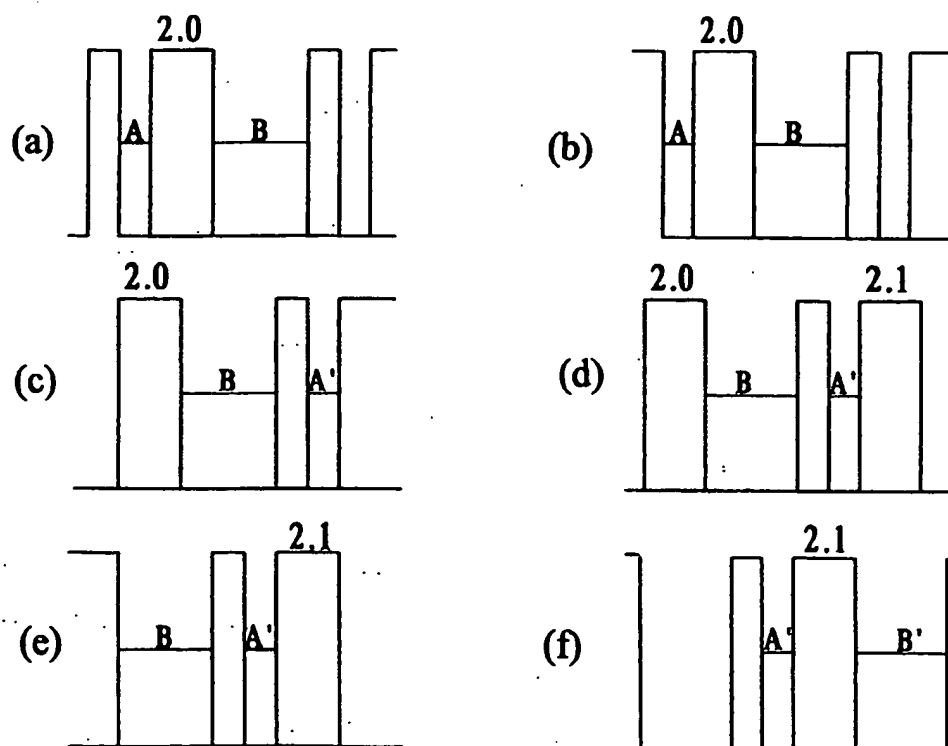FIG 11FIG 12


10/16

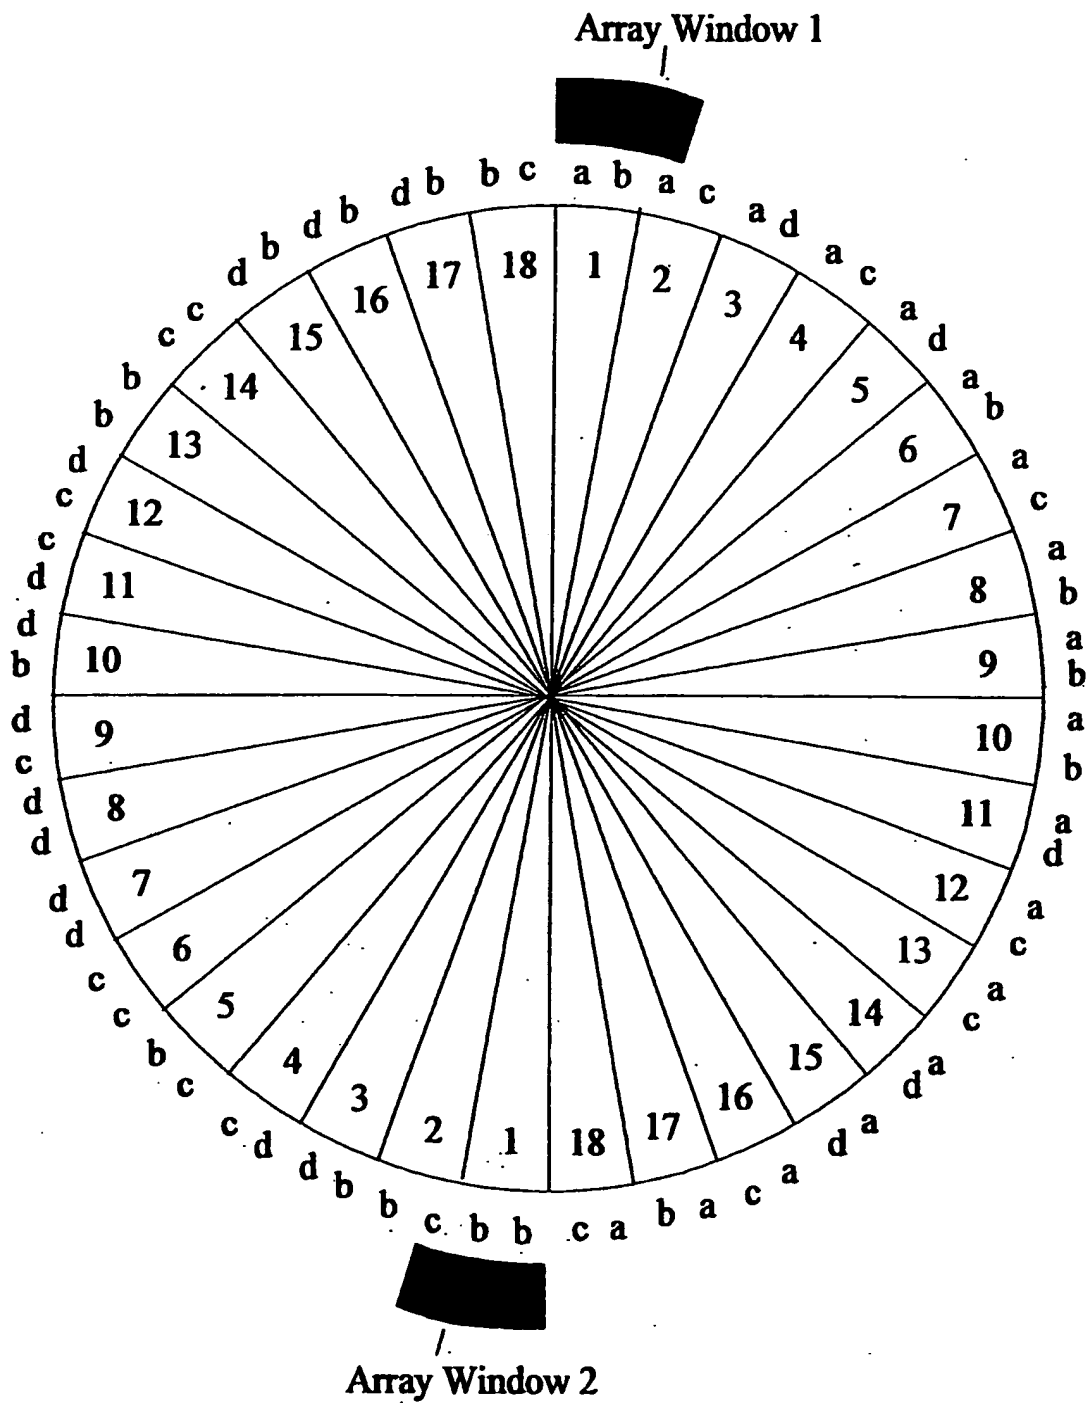FIG 13



11/16

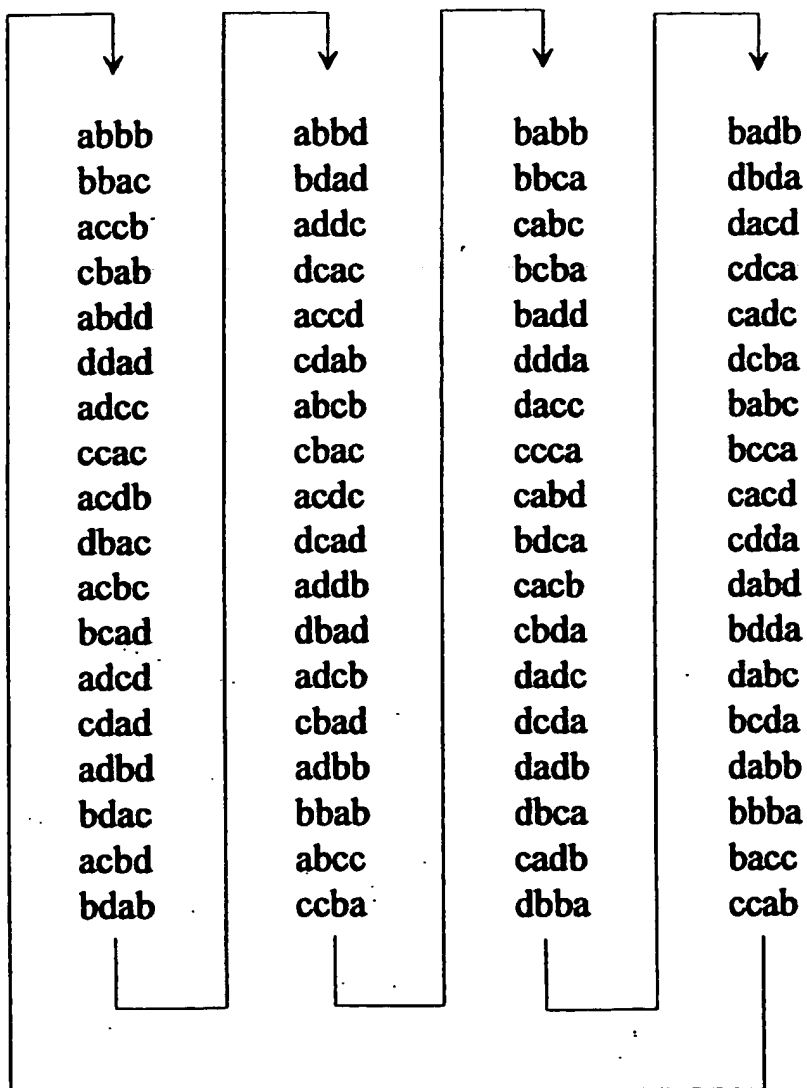FIG 14Code Sequence for 72-element Torque Sensor



12/16

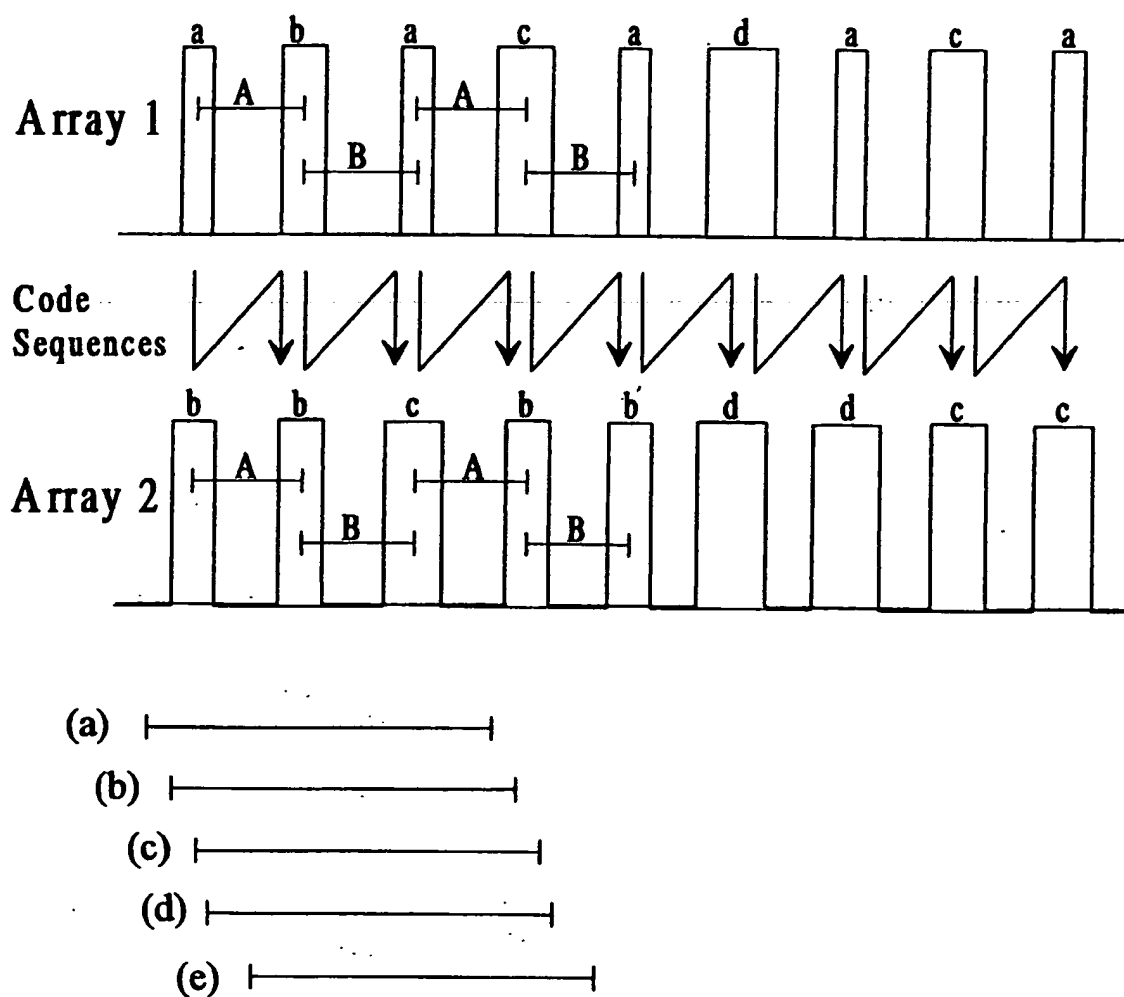FIG 15n.b. at zero torque, $A = B$



13/16

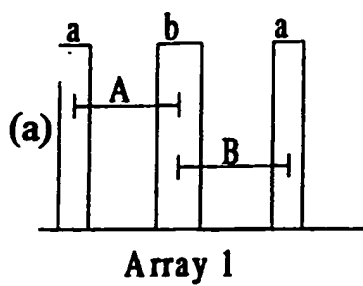FIG 16



Code Sequence : abbb

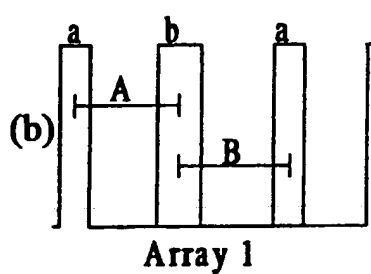



Code Sequence : bbac

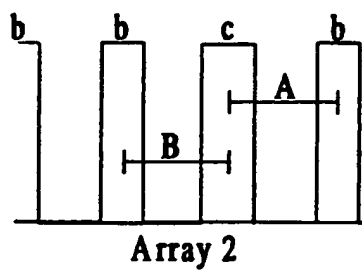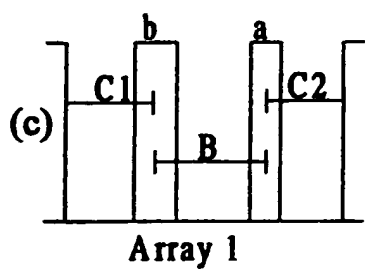

Code Sequence : bbac

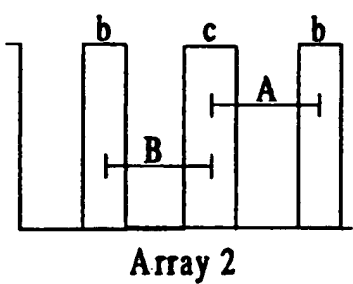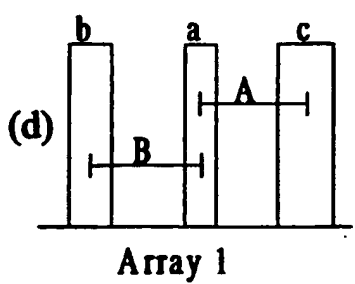


Code Sequence : bbac



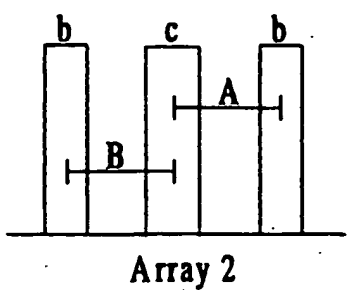
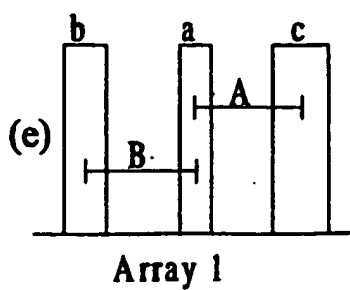


Code Sequence : bbac


14/16

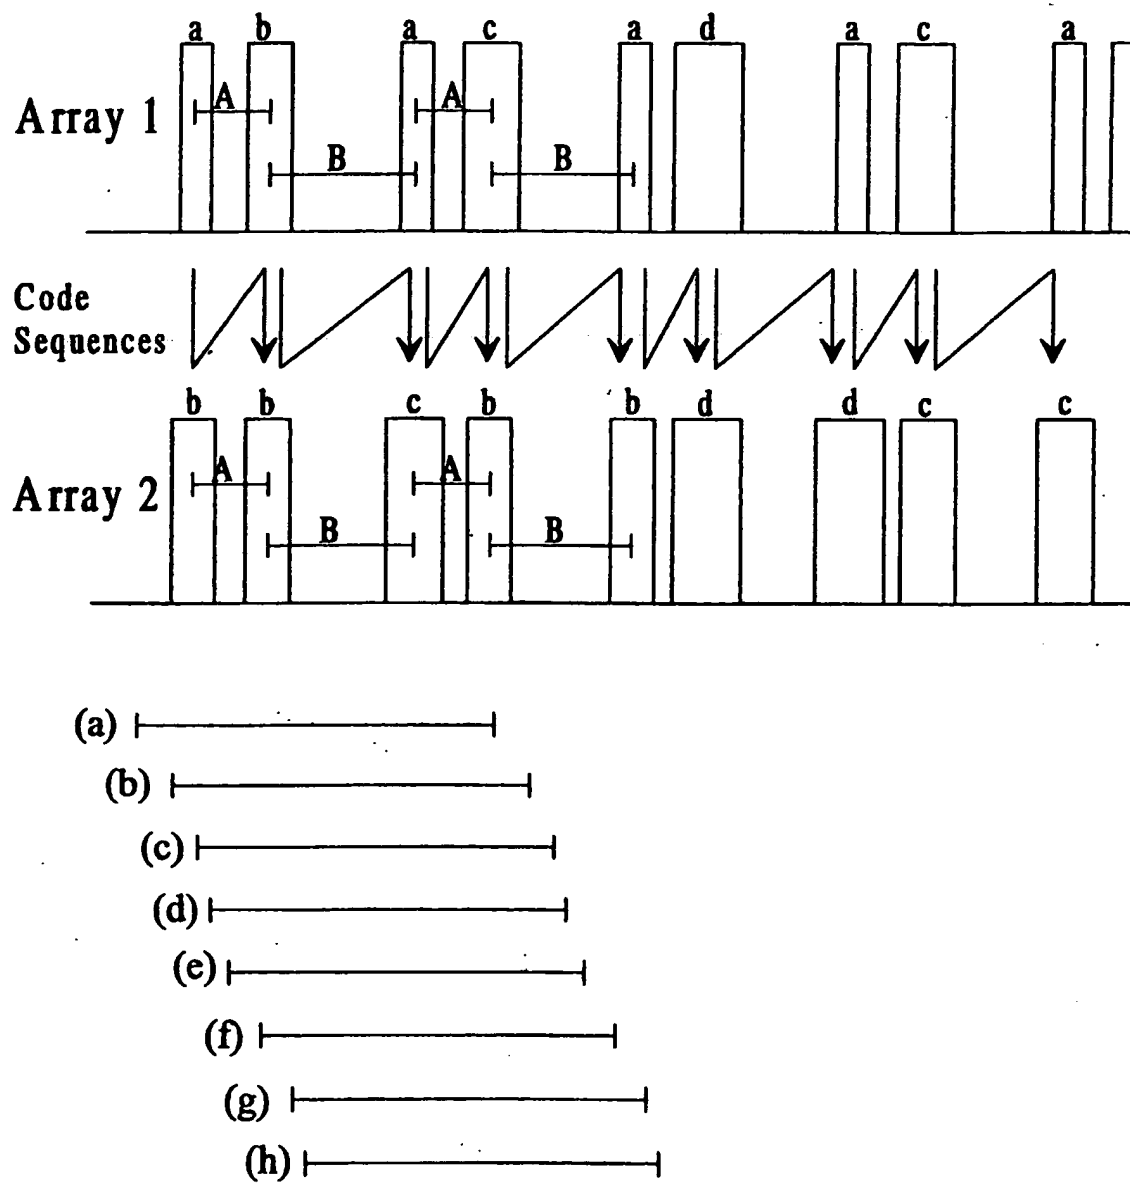FIG 17

15/16

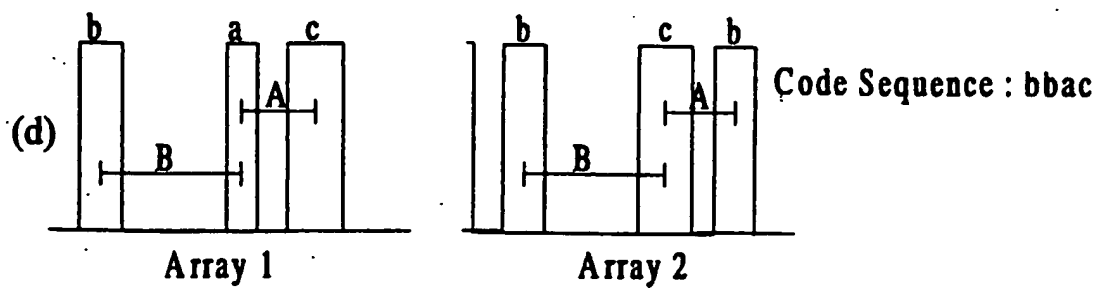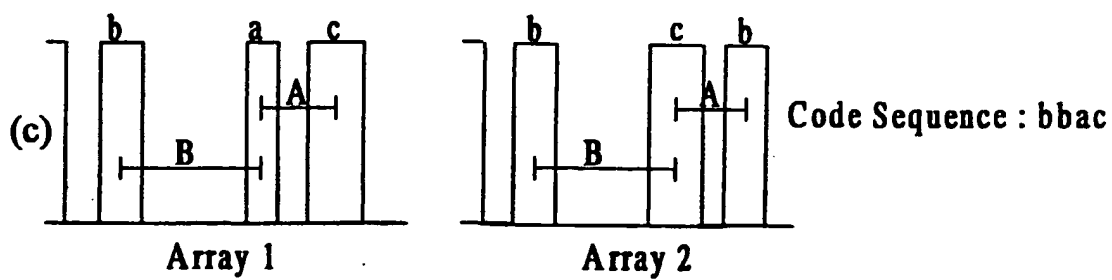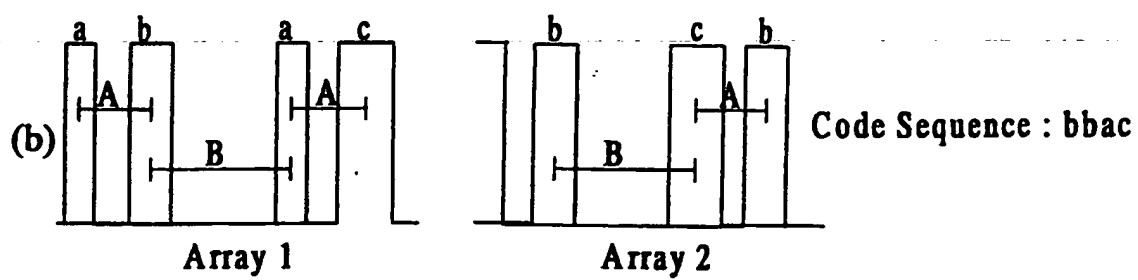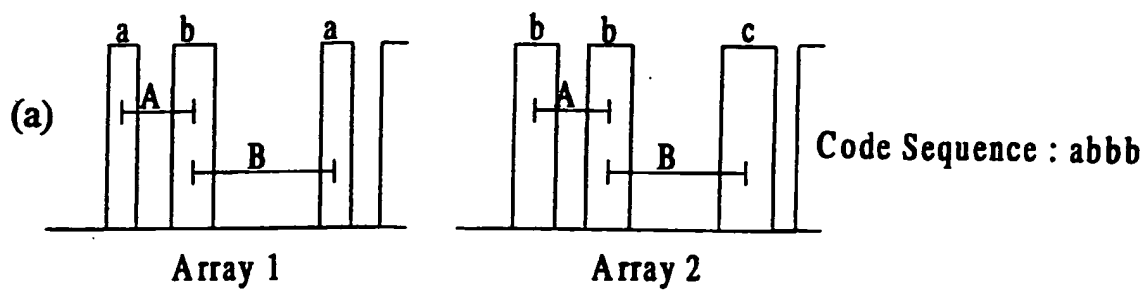FIG 18

16/16

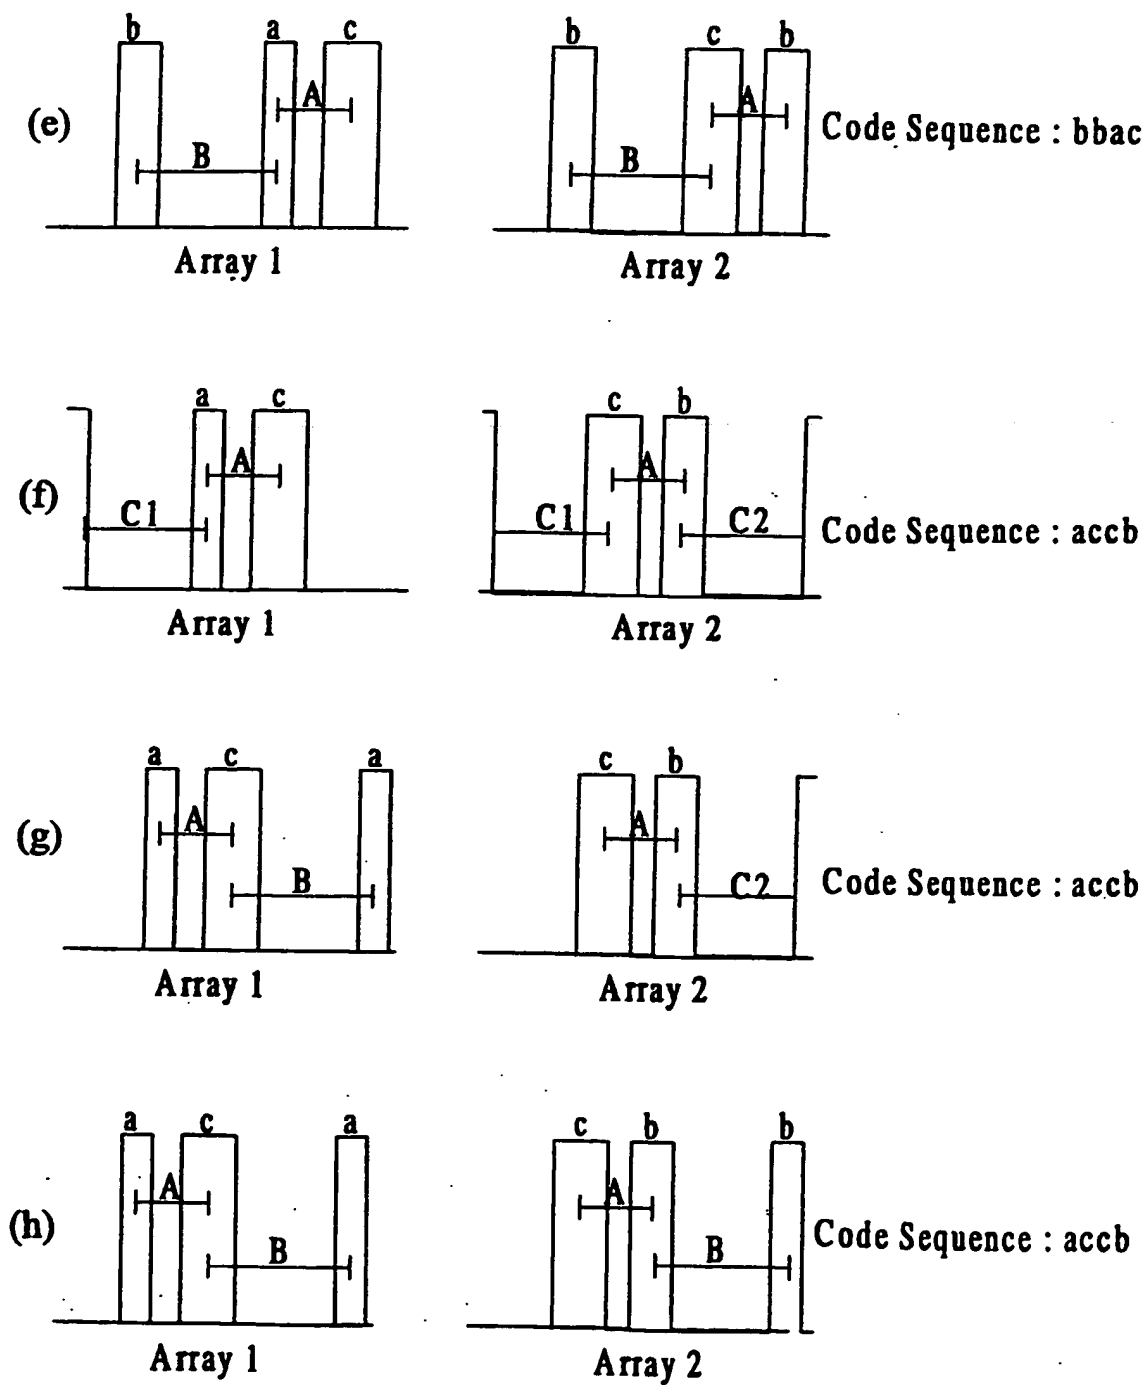FIG 19

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/00301

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G01L3/12 G01D5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01L G01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 841 132 A (HORTON ET AL.) 24 November 1998 cited in the application see claims 1-10; figure 1 & WO 96 06330 A	1-12
A	US 4 678 908 A (LAPLANTE) 7 July 1987 see column 6, line 9 - line 25; figures 1-3	1-12
A	US 4 866 268 A (TANG ET AL.) 12 September 1989 see claims 4,5; figures 2,5	1-12
A	EP 0 555 987 A (LUCAS INDUSTRIES PUBLIC LTD.) 18 August 1993 see claim 1; figure 3	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

30 June 1999

Date of mailing of the international search report

06/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mucs, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 99/00301

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5841132 A	24-11-1998	EP 0777851 A WO 9606330 A JP 10504651 T	11-06-1997 29-02-1996 06-05-1998
US 4678908 A	07-07-1987	US 4602155 A CA 1264078 A GB 2168477 A,B	22-07-1986 27-12-1989 18-06-1986
US 4866268 A	12-09-1989	NONE	
EP 555987 A	18-08-1993	DE 69306431 D DE 69306431 T JP 5281060 A US 5369583 A	23-01-1997 17-04-1997 29-10-1993 29-11-1994